


剖面 A-A

■ SPECIFICATION





- Voltage rating: 150V AC, DC
- Current Rating: 1A, AC, DC
- Withstand voltage: 500V AC/minute
- Contact resistance: 30mΩ max
- Insulation resistance: 100MΩ min
- Temperature range: -25° C ~ +85° C

■ WAFER

- Material: Base, PA9T UL94V-0; COLOR, NATURL
- Contact area: Phosphor Tin-plated
- Solder area: Phosphor Tin-plated

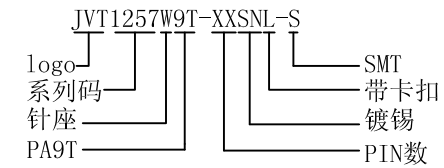

Poles	DIM(mm)			Poles	DIM(mm)		
	A	B	C		A	B	C
2	1.25	3.85	5.75	9	10.00	12.60	14.50
3	2.50	5.10	7.00	10	11.25	13.85	15.75
4	3.75	6.35	8.25	11	12.50	15.10	17.00
5	5.00	7.60	9.50	12	13.75	16.35	18.25
6	6.25	8.85	10.75	13	15.00	17.60	19.50
7	7.50	10.10	12.00	14	16.25	18.85	20.75
8	8.75	11.35	13.25	15	17.50	20.10	22.00

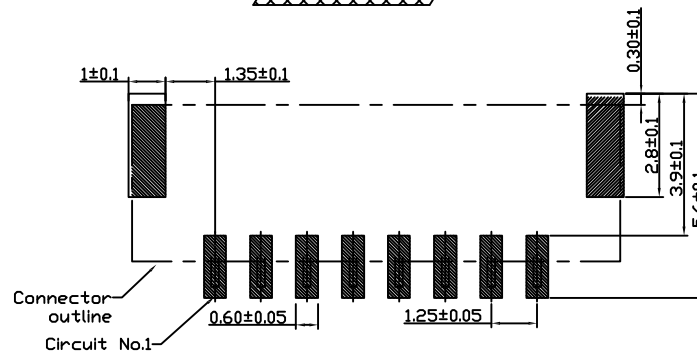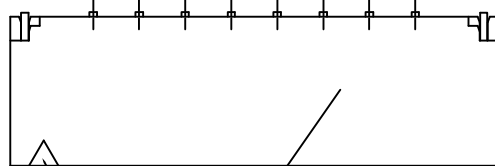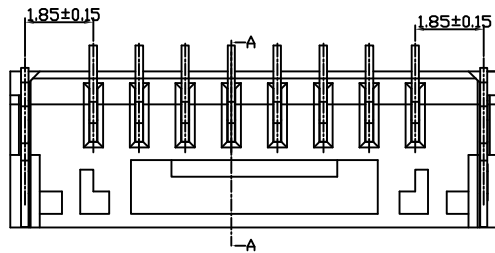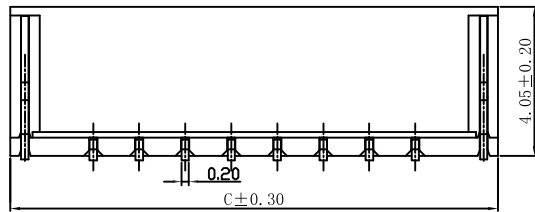

PCB LAYOUT

GENERAL TOLERANCE	
0	±0.35
.0	±0.30
.00	±0.20
.000	±0.10

版本	变更内容	日期	单位	mm	比例	1:1	日期	20130703
----	------	----	----	----	----	-----	----	----------



核准	审核	绘图	品名	GHR 1.25mm SMT 立式 WAFER		
	BOLLY	许向毅	料号	JVT1257W9T-XXSNL-S		
			图名	049	版本	A