





RoHS

REVISION DATE

ITEM	DESCRIPTION	DATE
A	Issue	

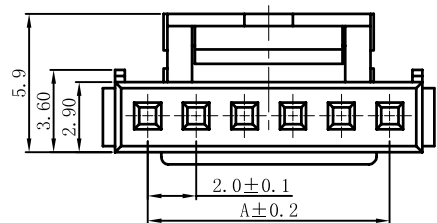

5-16PIN



■ SPECIFICATION




- Voltage rating: 125V AC, DC
- Current Rating: 2A, AC, DC
- Withstand voltage: 1000V AC/minute
- Contact resistance: 20mΩ max
- Insulation resistance: 1000MΩ min
- Temperature range: -25° C ~ +85° C

■ HOUSING




- Material: PA66 UL94V-0

JVT1128HNO-XXL  
 logo 系列码 胶壳  
 带卡扣 PIN数 PA66 UL94V-0


Poles	DIM			
	A	B	C	D
02	2.0	4.6	5.6	3.2
03	4.0	6.6	7.6	4.0
04	6.0	8.6	9.6	5.0
05	8.0	10.6	11.6	6.2
06	10.0	12.6	13.6	8.2
07	12.0	14.6	15.6	10.2
08	14.0	16.6	17.6	12.2
09	16.0	18.6	19.6	14.2
10	18.0	20.6	21.6	16.2
11	20.0	22.6	23.6	16.2
12	22.0	24.6	25.6	16.2
13	24.0	26.6	27.6	16.2
14	26.0	28.6	29.6	16.2
15	28.0	30.6	31.6	16.2
16	30.0	32.6	33.6	16.2




2-3PIN



4PIN



4PIN



投影 (PROJECT)		公差 (TOLERANCE)	
单位 (UNIT)	mm	0	±0.40
比例 (SCALE)	FIT	0.0	±0.30
版本 (EDITION)	A	0.00	±0.20
日期 (DATE)	2013 10 31	0.000	±0.05

东莞市乔业电子有限公司  
 DONG GUAN CHYAO YEE (JVT) CONNECTORS CO., LTD.

绘图 (DRAWN)	TONY	品号 (PART NO)	JVT1128HNO-XXL	页次 (PAGE)	
审核 (CHECKED)	CHEN	图号 (DRAW NO)	031-1128-01	1/1	
核准 (APPROVE)		品名 (NAME)	PHS 2.0mm HSG WITH LOCK		